

TH406 - TH407

TELEHANDLERS





**POWERFUL
FAST
VERSATILE
COMFORTABLE**

TH406 - TH407

Mono bloc chassis with low centre of gravity and wide wheelbase for improved feel

Optional rear auxiliary service for trailers

Powersynchro transmission and all-mechanical driveline ensure trouble-free life in tough applications

Reliable Cat turbocharged engines certified to meet Stage IIIA regulations

150 litre fuel tank and hydraulic tank with site glass



Service access points are conveniently located under the engine cover

Ready To Go. 365 Days A Year.

A powerful engine, load-sensing hydraulics and high levels of manoeuvrability help you get jobs done quicker. The cab is comfortable, and the single joystick controls are smooth and well positioned, so you stay fresh, focused and effective.

Cat® quick change work tools ensure impressive performance across a wide range of applications. From haymaking to mucking out, from loading to digging, your Cat telehandler will do it all - and more.

Luxury cabin with well positioned controls, comfortable air suspension seat and optional air conditioning

With 3700 kg of lift capacity and 6.1 metre to 7.3 metre of lift height you can place loads with greater ease

Standard Z-bar linkage for strong breakout forces

Load-sensing, flow-sharing hydraulic system. All boom functions can be operated simultaneously and proportionally

Cat quick change work tools ensure impressive performance across a wide range of applications




TH406, TH407 Telehandlers

Specifications	TH406	TH407
Maximum lift height	6100 mm	7300 mm
Rated Load Capacity	3700 kg	3700 kg
Maximum forward reach	3109 mm	3763 mm
Gross engine power	101 / 126 hp	101 / 126 hp
Maximum speed	32 / 40 km/h	32 / 40 km/h
Maximum pump flow	150 L/min	150 L/min
Wheelbase	2950 mm	3050 mm
Turning radius	3585 mm	3700 mm
Fuel tank capacity	150 L	150 L



Dimensions

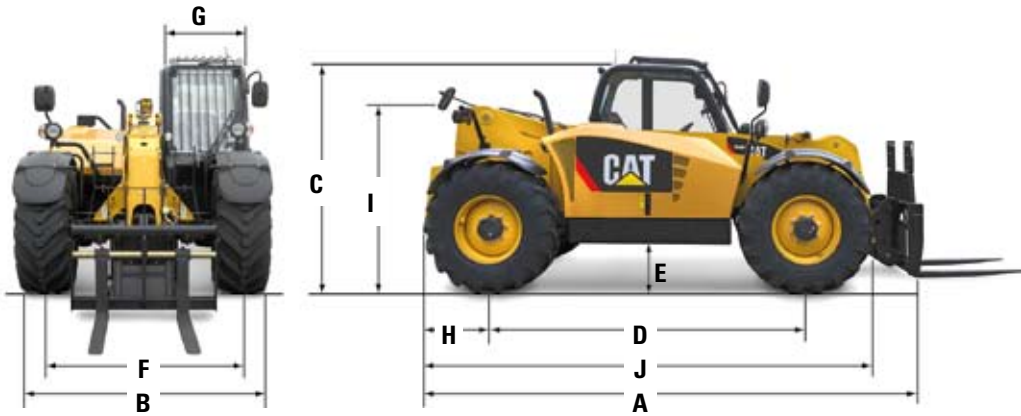

mm	A	B	C	D	E	F	G	H	I	J
TH406	4621	2400	2323	2950	407*	1988	920	889	1753	4253
TH407	5153	2400	2385	3050	407*	1988	920	1189	1838	4679

* With Michelin 460/70 R24 XMCL tyres

©2008 Caterpillar, All Rights Reserved. CAT, CATERPILLAR, their respective logos, "Caterpillar Yellow" and the POWER EDGE trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

Due to continuous product improvements, machine specifications and/or equipment changes may be made without prior notification.



For more information, please visit www.finning.co.uk/agriculture